arXiv:1206.6648v1 [math.OC] 28 Jun 2012

ASYNCHRONOUS DECENTRALIZED EVENT-TRIGGERED CONTROL

MANUEL MAZO JR. AND MING CAO

Abstract. In this paper we propose two approaches to the implementation of controllers with decentralized strategies triggering controller updates. We consider set-ups with a central node in charge of the computation of the control commands, and a set of not co-located sensors providing measurements to the controller node. The solutions we propose do not require that all measurements from the sensors are synchronized in time. The sensors in our proposal provide measurements in an aperiodic way triggered by local conditions. Furthermore, in the second of the proposed implementations (most of) the communication between nodes require only the exchange of one bit of information (per controller update), which could aid in reducing transmission delays and as a secondary effect result in fewer transmissions being triggered.

1. Introduction

Aperiodic control techniques have recently gained much attention due to the opportunities they open to reduce bandwidth and computation requirements in control systems implementations [4, 20, 2]. These savings are especially relevant in the implementation of control loops over wireless channels [3, 19]. In those set-ups there is not only a limited bandwidth available, but also sensor nodes may have limited energy provided by batteries. It is therefore interesting to explore approaches which may save energy expenditures at the sensors by *e.g.* reducing the number of transmissions from those sensors, or reducing the amount of time the sensor nodes need to keep their radios listening for possible communications from other nodes. While there is an extensive recent literature in the event-triggered community aimed at reducing the amount of transmissions necessary to close the control loop while maintaining stability [8, 5, 12, 17, 22], the problem of reducing listening time has received less attention [23, 15, 14]. Nevertheless, it is a well-known phenomena in the sensor networks community that reducing listening times has a bigger impact on the power burden than reducing transmissions [24]. In the present paper we try to bridge this gap by proposing controller implementations focused on reducing listening times. In order to attain this goal, we propose techniques in which the sensors do not need to coordinate with each other, and therefore do not need to listen to each other. Instead, in the proposed implementations the sensors

---

This work was partially supported by grants from the Dutch Organization for Scientific Research (NWO), the Dutch Technology Foundation (STW) and the European Union Seventh Framework Programme [FP7/2007-2013] under grant agreement 257462 HYCON2 Network of Excellence.

M. Mazo Jr is with INCAS^3, Assen and the Department of Discrete Technology and Production Automation, University of Groningen, The Netherlands, `m.mazo@rug.nl`.

M. Cao is with the Department of Discrete Technology and Production Automation, University of Groningen, The Netherlands, `m.cao@rug.nl` .

send measurements triggered by local conditions, irrespective of what the other sensors are doing, in contrast with previous work on decentralized triggering [16].

The second of the two possible implementations that we propose, also enables the stabilization of systems employing communication packets with very small payload. In particular, our technique reduces the amount of payload needed to essentially one bit. To appreciate the relevance of reducing the packets payload, besides reducing power consumption [24], one must notice that a large portion of delays in communications are due to transmission delay. These transmission delays are dependent on the size of the packages transmitted, and thus reducing the payload will indirectly reduce the communication delays present in the system. Event-triggered implementations of control systems accommodate delays by making more conservative the conditions that trigger communications than those in the delay free case. Employing more conservative conditions results, in general, in more frequent transmissions of measurements. Thus, a reduction on the payload is also expected to result in a reduction on the amount of transmissions from the sensors to the controller.

The ideas in the present paper will remind the reader of dynamic quantizers for control [11] and of dead-band control [18]. We have, in a way, combined those ideas with recent approaches to event-triggered control stemming from [20] to provide a formal analysis of implementations benefiting from all those ideas. The current paper is the result of merging previous conference contributions by the authors, providing a unified analysis and removing early mistakes and imprecise statements. As such it should be seen as a more accurate and easier to follow analysis of the proposals in [14] and [15].

2. PRELIMINARIES

We denote the positive real numbers by $\mathbb{R}^+$ and by $\mathbb{R}^+_0 = \mathbb{R}^+ \cup \{0\}$. We also use $\mathbb{N}$ to denote the natural numbers including zero. The usual Euclidean (l_2) vector norm is represented by $|\cdot|$. Given an open set $B \subseteq \mathbb{R}^n$, we say that a function $f : \mathbb{R}^n \to \mathbb{R}^m$ is Lipschitz continuous on B if there exists a constant $L \in \mathbb{R}^+_0$ such that: $|f(x) - f(y)| \leq L|x - y|$, $\forall x, y \in B$. A function $\gamma : [0, a[\to \mathbb{R}^+_0$, $a > 0$ is of class $\mathcal{K}_\infty$ if it is continuous, strictly increasing, $\gamma(0) = 0$ and $\gamma(s) \to \infty$ as $s \to \infty$. A continuous function $\beta : \mathbb{R}^+_0 \times [0, a[\to \mathbb{R}^+_0$ is of class $\mathcal{KL}$ if $\beta(\cdot, \tau)$ is of class $\mathcal{K}_\infty$ for each $\tau \geq 0$ and $\beta(s, \cdot)$ is monotonically decreasing to zero for each $s \geq 0$. Given an essentially bounded function $\delta : \mathbb{R}^+_0 \to \mathbb{R}^m$ we denote by $\|\delta\|_\infty$ the $\mathcal{L}_\infty$ norm, *i.e.* $\|\delta\|_\infty = \sup_{t \in \mathbb{R}^+_0}\{|\delta(t)|\} < \infty$.

The notion of Input-to-State stability (ISS), [1], formalized in the following, will be central to our discussion:

Definition 3 (Input-to-State Stability).
A control system $\dot{\xi} = f(\xi, \upsilon)$ is said to be input-to-state stable *(ISS) with respect to υ if there exists $\beta \in \mathcal{KL}$ and $\gamma \in \mathcal{K}_\infty$ such that for any $t \in \mathbb{R}^+_0$ and for all $x \in \mathbb{R}^n$:*

$$|\xi_{x\upsilon}(t)| \leq \max\{\beta(|x|, t), \gamma(\|\upsilon\|_\infty)\}.$$

We shall refer to (β, γ) as the *ISS gains* of the ISS estimate.

Rather than relying on this definition, most of our arguments make use of the following alternative characterization of ISS systems using ISS Lyapunov functions, [1]:

Definition 4 (ISS Lyapunov function).
A smooth function $V : \mathbb{R}^n \to \mathbb{R}^+_0$ is said to be an ISS Lyapunov function for the

closed-loop system $\dot{\xi} = f(\xi, \upsilon)$ *if there exists class* $\mathcal{K}_\infty$ *functions* $\underline{\alpha}$, $\overline{\alpha}$, α_x *and* α_e *such that for all* $x \in \mathbb{R}^n$ *and* $u \in \mathbb{R}^m$ *the following is satisfied:*

$$\begin{aligned} \underline{\alpha}(|x|) \leq \quad & V(x) \quad \leq \overline{\alpha}(|x|) \\ \nabla V \cdot f(x,u) \quad & \leq \quad -\alpha_x(|x|) + \alpha_e(|u|). \end{aligned} \tag{1}$$

A system is ISS if and only if there exists an ISS Lyapunov function.

We introduce also an auxiliary $\mathcal{K}_\infty$ function α_v, defined as

$$\alpha_v(s) := \alpha_x \circ \overline{\alpha}^{-1}(s),\ \forall\, s \in \mathbb{R}_0^+. \tag{2}$$

Note that for an ISS system, using the above definition, one can provide the following bound of the Lie derivative of its ISS-Lyapunov function along the system's flow:

$$\nabla V \cdot f(x,u) \leq -\alpha_v \circ V(x) + \alpha_e(|u|).$$

As usual, one can make a distinction between systems satisfying the ISS property locally (on some compact sets of the state and error spaces) or globally.

We will also make use of the notion of semiglobal practical stabilizability, [10], which is formalized in the following definition:

Definition 5 (Semiglobal Practical Stabilizability)**.**
A system $\dot{\xi} = f(\xi, \upsilon)$ *is said to be* semiglobally practically stabilizable *if for any (arbitrarily large) compact set* K *and any arbitrarily small compact set* Q *including the origin, there exists a feedback law* $k : \mathbb{R}^n \to \mathbb{R}^m$*, which in general depends on* K *and* Q*, such that every trajectory* ξ *with initial condition* $\xi(0) \in K$ *is defined for all* $t \in [0, \infty[$ *and there exists* $T \in [0, \infty[$ *such that* $\xi(t) \in Q$ *for all* $t \in [T, \infty[$.

6. Asynchronous Event-triggered Control

The problem we aim at solving is that of controlling systems of the form:

$$\dot{\xi}(t) = f(\xi(t), \upsilon(t)), \qquad \forall t \in \mathbb{R}_0^+, \tag{3}$$

where $\xi : \mathbb{R}_0^+ \to \mathbb{R}^n$ and $\upsilon : \mathbb{R}_0^+ \to \mathbb{R}^m$. In particular, we are interested in finding stabilizing sample-and-hold implementations of a controller k such that updates can be performed transmitting asynchronous and aperiodic measurements of each entry of the state vector. Furthermore, if possible we would like to do so while reducing the amount of transmissions. This problem can be formalized as follows:

Problem 7. *Given system (3) and a controller* $k : \mathbb{R}^n \to \mathbb{R}^m$ *find sequences of update times* $\{t^i_{r_i}\}$, $r_i \in \mathbb{N}$ *for each sensor* $i = 1, \dots, n$ *such that an asynchronous sample-and-hold controller implementation:*

$$\begin{aligned} \upsilon_j(t) = \quad & k_j(\xi_1(t^1_{r_1}), \xi_2(t^2_{r_2}), \dots, \xi_n(t^n_{r_n})),\ j = 1, \dots, m \\ & t \in [\max_{i=1,\dots,n}\{t^i_{r_i}\}, \min_{i=1,\dots,n}\{t^i_{r_i+1}\}[, \end{aligned} \tag{4}$$

renders the closed-loop system asymptotically (or practically) stable.

Let us start introducing the main technical assumption of the paper:

Assumption 8 (ISS w.r.t. measurement errors)**.** *Given system (3) there exists a controller* $k : \mathbb{R}^n \to \mathbb{R}^m$ *such that the closed-loop system*

$$\dot{\xi}(t) = f(\xi(t), k(\xi(t) + \varepsilon(t))), \qquad \forall t \in \mathbb{R}_0^+ \tag{5}$$

is ISS with respect to measurement errors ε *on compact sets* $X \subset \mathbb{R}^n$ *and* $E \subset \mathbb{R}^m$ *containing the origin.*

While one can slightly relax the following[1], in order to keep the presentation clean let us introduce one more assumption:

Assumption 9 (Lipschitz continuity)**.**
The functions f and k, defining the dynamics and controller of a system, are Lipschitz on compacts.

Representing the effect of the sample-and-hold as a measurement error at each sensor for all $i = 1, \ldots, n$ as:

$$\varepsilon_i(t) = \xi_i(t^i_{r_i}) - \xi_i(t),\ t \in [t^i_{r_i}, t^i_{r_i+1}[,\ r_i \in \mathbb{N}$$

we propose rules defining implicitly the sequences of update times $\{t^i_{r_i}\}$ for each sensor i:

$$t^i_{r_i} = \min\{t > t^i_{r_i-1} \,|\, \varepsilon_i^2(t) = \eta_i\}, \tag{6}$$

where $\eta_i > 0$ are design parameters.

For convenience and compactness of the presentation we introduce the new variable:

$$\eta := \sqrt{\sum_{i=1}^{n} \eta_i}, \tag{7}$$

and consider it as a design parameter that once specified restricts the choices of η_i to be used at each sensor. We remark now that with this definition the update rule (6) implies that $|\varepsilon(t)| \leq \eta$. Furthermore, we assume that the local parameters η_i are defined through an appropriate scaling:

$$\eta_i = \theta_i^2 \eta^2,$$

with $\theta_i \in]0, 1[$ as design constants so that the restriction (7) holds.

Now, we can state the following lemma which will be central in the rest of the discussion:

Lemma 10 (Inter-transmission times bound)**.**
If Assumptions 8 and 9 hold and:

$$\eta \ \geq\ \rho \underline{\alpha}^{-1}(\max\{V(\xi(t_o)), \alpha_v^{-1} \circ \alpha_e(\eta)\})$$

for some design parameter $\rho \in \mathbb{R}^+$, then a lower bound for the minimum time between transmissions of a sensor, for all time $t \geq t_o$, is given by:

$$\tau_i^* \geq \frac{L_{f_i}^{-1} \rho \theta_i}{1 + \rho}. \tag{8}$$

where L_{f_i} denotes the Lipschitz constant of the function $f_i(x, k(x + e))$.

Proof. Let us denote in what follows by:
$\overline{f}_i(y, z) = \max_{(x,e) \in S(y,z)} |f_i(x, k(x + e))|$ and by $S(y, z) = \{(x, e) \in \mathbb{R}^{n\times n} \,|\, V(x) \leq y,\ |e| \leq z\}$. Start by recalling that the minimum time between events at a sensor is given by the time it takes for $|\varepsilon_i|$ to evolve from the value $|\varepsilon_i(t^i_{k_i})| = 0$ to $|\varepsilon_i(t^{i-}_{k_i+1})| = \sqrt{\eta_i}$. Therefore all that needs to be proved is the existence of an upper bound on the rate of change of $|\varepsilon_i|$. By Assumption 8 we have that: $V(x) > \alpha_v^{-1} \circ$

---

[1] In fact, for our purposes, it would be sufficient to have that $\exists L$ such that $|f(x, k(x + e)| \leq L(|x| + |e|)$.

$\alpha_e(\eta) \Rightarrow \dot{V}(x) < 0$ and thus we have that for any $\kappa \in \mathbb{R}_0^+$ the set $S(\alpha_v^{-1} \circ \alpha_e(\eta) + \kappa, \eta)$ is forward invariant. One can trivially bound the evolution of $|\varepsilon|$ as:

$$\frac{d}{dt}|\varepsilon_i| \quad \leq \quad |\dot{\varepsilon}_i| = |f_i(\xi, k(\xi + \varepsilon))|,$$

and the maximum rate of change of $|\varepsilon_i|$ by $\overline{f}_i(\max\{V(\xi(t_o)), \alpha_v^{-1} \circ \alpha_e(\eta)\}, \eta)$. Note that the existence of such a maximum is guaranteed by the continuity of the maps f and k and the compactness of the set $S(\max\{V(\xi(t_o)), \alpha_v^{-1} \circ \alpha_e(\eta)\}, \eta)$. Assumption 9 implies that $f_i(x, k(x + e))$ is also Lipschitz. and thus one can further bound $\overline{f}_i(\max\{V(\xi(t_o)), \alpha_v^{-1} \circ \alpha_e(\eta)\}, \eta) \leq L_{f_i}\left(\underline{\alpha}^{-1}(\max\{V(\xi(t_o)), \alpha_v^{-1} \circ \alpha_e(\eta)\}) + \eta\right)$. Finally, a bound for the inter-transmission times is given by:

$$\tau_i^* \geq \frac{L_{f_i}^{-1}\theta_i\eta}{\underline{\alpha}^{-1}(\max\{V(\xi(t_o)), \alpha_v^{-1} \circ \alpha_e(\eta)\}) + \eta} \geq \frac{L_{f_i}^{-1}\rho\theta_i}{1+\rho}, \tag{9}$$

where we used the assumptions $\eta_i = \theta_i^2\eta^2$ and $\eta \geq \rho\underline{\alpha}^{-1}(\max\{V(\xi(t_o)), \alpha_v^{-1} \circ \alpha_e(\eta)\})$. ☐

With this result one can state the following theorem:

Theorem 10.1 (Semiglobal Practical Stability). *If Assumptions 8 and 9 hold, then system (3) is semiglobally practically stabilizable using asynchronous measurements. In particular, any controller rendering the closed-loop system ISS implemented as prescribed by (4) with update rules of the form (6) renders the closed loop system practically stable. Moreover, the time between transmissions of measurements at each sensor is bounded from below by some* $\tau_i^* > 0$, $i = 1, \ldots, n$.

Proof. Trivially, using the ISS property of the system and the fact that the update rule (6) imposes $|e| \leq \eta$, one has that $\dot{V} \leq -\alpha_v \circ V(x) + \alpha_e(\eta)$. This in turn means that for $V(x) > \alpha_v^{-1} \circ \alpha_e(\eta)$ one has $\dot{V}(x) < 0$. Thus, the Lyapunov function V enters the forward-invariant compact set $\{s \in \mathbb{R}_0^+ | s \leq \alpha_v^{-1} \circ \alpha_e(\eta) + \epsilon\}$, for any arbitrarily small ϵ, in finite time.

Note that this compact set can be made arbirarily small by reducing η. Finally, Lemma 10 shows that the system cannot get stuck in a Zeno execution which concludes the proof. ☐

In general, fixing a constant threshold value η will lead to either unreasonably small inter-transmission times or to a too large set to which the system converges. In order to solve this problem the following lemma establishes a straightforward approach to construct asymptotic stabilizing asynchronous implementations. The main idea is to let the parameter η change over time as:

$$\eta(t) = \eta(t_{r_c}^c), \ \forall t \in [t_{r_c}^c, t_{r_c+1}^c[. \tag{10}$$

Lemma 11 (Asymptotic stability). *If Assumptions 8 and 9 are satisfied and the following two conditions hold:*

- $\eta(t_{r_c}^c) < \eta(t_{r_c-1}^c)$;
- $\eta(t_{r_c}^c) \geq \rho\underline{\alpha}^{-1}(\max\{V(\xi(t_{r_c}^c)), \alpha_v^{-1} \circ \alpha_e(\eta(t_{r_c}^c))\})$;

for a divergent sequence of times $\{t_{r_c}^c\}$ *and any selection of* $\eta_i(t_{r_c}^c) = \theta_i^2\eta^2(t_{r_c}^c) > 0$ *satisfying (7), the closed loop system is asymptotically stable.*

Furthermore, the minimum time between transmissions is bounded from below by the value τ_i^* *given by (9), except for possible violations at* $t^c_{r_c}$, $r_c \in \mathbb{N}$.

Proof. The proof is trivial once it is noticed that the sequence $\{\eta(t^c_{r_c})\}$ governs the size of the ball to which the system converges. The second condition is only used to guarantee the minimum time between sensor transmissions as provided by Lemma 10. However, as indicated in the lemmas, at the times the thresholds are updated, an instantaneous triggering might occur that do not respect the bounds of times between transmissions. Note that such occurrences cannot lead to Zeno executions, since $\{\eta(t^c_{r_c})\}$ being divergent prevents the accumulation of such events, and therefore do not affect the convergence result. □

In Section 14 we address in detail how to obtain also bounds for the inter-execution times at the threshold update times $t^c_{r_c}$.

We address first the feasibility of the second assumption in the previous proposition. While for one specific initial condition $\xi(t^c_{r_c})$ and some value of $\eta(t^c_{r_c})$ it is always possible to find a positive constant ρ such that $\eta(t^c_{r_c}) \geq \rho\underline{\alpha}^{-1}(\max\{V(\xi(t^c_{r_c})), \alpha_v^{-1} \circ \alpha_e(\eta(t^c_{r_c}))\})$, as $\eta(t^c_{r_c})$ approaches zero this might not be possible. In particular it may be difficult to guarantee that there exists a $\rho \in \mathbb{R}^+$ such that:

$$\forall s \in\ [0, \eta(t_o)]\ \ s \geq \rho\underline{\alpha}^{-1} \circ \alpha_v^{-1} \circ \alpha_e(s). \tag{11}$$

For compactness of the notation, let us define the following $\mathcal{K}_\infty$ function:

$$\Gamma_1(s) := \underline{\alpha}^{-1} \circ \alpha_v^{-1} \circ \alpha_e(s). \tag{12}$$

A necessary and sufficient condition for the existence of a ρ satisfying (11) is given by the following condition which we take as an assumption in what follows:

Assumption 12 (Growth rate I)**.**
System (3) with controller k*, and Lyapunov function* V*, satisfies the following property:*

$$\lim_{s\to 0} \frac{\Gamma_1(s)}{s} < \infty.$$

In order to satisfy the conditions of Lemma 11, in [14] we proposed the use of either synchronous measurements at arbitrarily spaced time instants or the use of open-loop estimates of the evolution of the system in a self-triggered flavor. The idea of using synchronous measurements is to update the threshold to be used as: $\eta(t) = \rho\underline{\alpha}^{-1} \circ V(\xi(t^c_{r_c}))$ with synchronous measurements acquired at time $t^c_{r_c}$. This way of updating the thresholds, together with a proper selection of ρ to satisfy (11), guarantees that the second condition in Lemma 11 is satisfied. Yet, in order to apply Lemma 11 we need to show also that η decreases at every update. To do so, we note that $\eta(t^c_{r_c}) < \alpha_e^{-1} \circ \alpha_v \circ V(\xi(t^c_{r_c}))$ guarantees that $V(\xi(t)) < V(\xi(t^c_{r_c}))$ for all $t > t^c_{r_c}$, as it imposes that $\dot{V}(x) < 0$ for all x such that $V(x) \geq V(\xi(t^c_{r_c}))$. However, enforcing such an inequality requires finding a ρ such that:

$$\forall s \in\ [0, V(\xi(t_o))]\ \ \rho\underline{\alpha}^{-1}(s) < \alpha_e^{-1} \circ \alpha_v(s). \tag{13}$$

As in the case of (11), for such a ρ to exist an assumption needs to be put in place:

Assumption 13 (Growth rate II)**.**
System (3) with controller k*, and Lyapunov function* V*, satisfies the following property:*

$$\lim_{s\to 0} \frac{\underline{\alpha}^{-1}(s)}{\alpha_e^{-1} \circ \alpha_v(s)} < \infty.$$

We summarize this approach to asymptotic stability in the following theorem:

Theorem 13.1 (Asymptotic stability I)**.** *If Assumptions 8, 9, 12 and 13 hold, then any divergent sequence of times* $\{t^c_k\}$*, any* ρ *satisfying both (11) and (13), and any selection of* $\eta_i(t) = \theta_i \eta^2(t) > 0$ *satisfying (7) with*

$$\eta(t) = \rho \underline{\alpha}^{-1} \circ V(\xi(t^c_{r_c})),\ \forall\, t \in [t^c_{r_c}, t^c_{r_c+1}[$$

renders the system asymptotically stable. Furthermore, the minimum time between transmissions is bounded by the value τ^*_i *given by (9), except for possible violations at* $t^c_{r_c}$*,* $r_c \in \mathbb{N}$*.*

Proof. The result is a trivial application of Lemma 11, where the assumptions guarantee that a parameter ρ satisfying (11) and (13) are satisfied. In turn, such a ρ guarantees that the update rule for η forces η to decrease at each threshold update time. □

We want to remark that, in order to obtain an asymptotically stable implementation following the recommendation from this theorem, synchronous measurements are required at the instants t^c_k in order to compute $V(\xi(t^c_{r_c}))$. However, these synchronous measurements can be spaced arbitrarily apart in time, as the only requirement on the sequence $\{t^c_k\}$ is that it is divergent.

14. A FULLY EVENT BASED STRATEGY

In this section we present an alternative to synchronizing measurements from all sensors. This new approach relies on assuming that the time-varying threshold $\eta(t^c_{r_c})$, active in the interval $t \in [t^c_{r_c}, t^c_{r_c+1}[$, is selected following a predefined policy:

$$\eta(t^c_{r_c+1}) = \mu \eta(t^c_{r_c}),$$

for some $\mu \in]0,1[$. Given this update policy one can design an event-triggered policy to decide the sequence of times $\{t^c_{r_c}\}$ such that the system is rendered asymptotically stable. Furthermore, as we show later in this section, such a fully event-triggered implementation will enable asymptotic implementations only requiring the exchange of one bit of information whenever communication between sensor and controller, and vice-versa, is necessary. This new strategy uses two independent triggering mechanisms:

- **Sensor-to-controller:** Sensors send measurements to the controller whenever the local threshold is violated. As explained in the previous section, the update of the control commands is done with the measurements as they arrive in an asynchronous fashion.
- **Controller-to-sensor:** The controller commands the sensors to reduce the threshold used in their triggering condition when the system has slowed down enough to guarantee that the intersample times remain at the desired size. The triggering condition is based on the system entering a smaller Lyapunov level set which, by the lipschitz assumption on the dynamics, implies slower dynamics of the system.

The mechanism to trigger sensor to controller communication has already been analyzed in the previous section. In what follows we concentrate on describing and analyzing the triggering mechanism for the communication from controller to sensors. We present first what kind of estimates of the Lyapunov function the controller can obtain using the information it receives from the sensors. These estimates are then used to derive the triggering condition at the controller. At the end of the section we analyze the more practical aspects of the proposed implementation.

14.1. **Bounds of the Lyapunov function.** We start by establishing bounds of the evolution of the Lyapunov function computable at the controller. Denote by $\hat{\xi}$ the vector with entries:

$$\hat{\xi}_i(t) = \xi_i(t^i_{r_i}),\ t \in [t^i_{r_i}, t^i_{r_i+1}[\, \forall\, i = 1, \dots, n.$$

Thus, $\hat{\xi}$ can be seen as the value of the state vector that the controller is using to compute the input to the system. The controller can at all times estimate a bound for the value of the Lyapunov function as:

$$\begin{aligned} V(\xi(t)) &\leq \overline{V}(\xi(t)) && (14)\\ \overline{V}(\xi(t)) &:= \overline{\alpha}(\lceil \xi \rceil(t)), && (15) \end{aligned}$$

where the vector $|\overline{\xi}|$ is obtained as:

$$\begin{aligned} \lceil \xi \rceil(t) &:= |\hat{\xi}(t)| + \eta(t^c_{r_c}) \geq |\hat{\xi}(t) - \varepsilon(t)| \\ &= |\xi(t)|,\ \forall\, t \in [t^c_{r_c}, t^c_{r_c+1}[. && (16) \end{aligned}$$

Note that the computation of this estimate also implies that $\lceil \xi \rceil(t) < |\xi(t)| + 2\eta(t^c_{r_c})$.

14.2. **Triggering condition for the thresholds update.** Making use of the upper bound $\overline{V}$, the sequence of times for the updates of the sensor thresholds can be generated through an event-triggering mechanism at the controller:

$$t^c_{r_c+1} = \min\{t \geq t^c_{r_c} \mid \rho\underline{\alpha}^{-1} \circ \overline{V}(\xi(t)) \leq \mu\eta(t^c_{r_c})\}. \tag{17}$$

Such a mechanism, using $\mu \in]0, 1[$ and selecting the right ρ to satisfy (11), guarantees that:

$$\eta(t^c_{r_c}) \ \geq\ \rho\underline{\alpha}^{-1}(\max\{V(\xi(t^c_{r_c})), \alpha_v^{-1} \circ \alpha_e(\eta(t^c_{r_c}))\}),$$

and that $\eta(t^c_{r_c}) < \eta(t^c_{r_c-1})$ as required by Lemma 11. Thus, it also guarantees that the minimum times between transmissions provided by Lemma 10 are respected in between $t^c_{r_c}$ and $t^c_{r_c+1}$, $\forall r_c \in \mathbb{N}$. However, at the threshold update times $t^c_{r_c}$ the minimum time between updates could still be violated. This problem is addressed in the next subsection when describing the practical implementation that we propose.

In order to obtain a useful implementation one has to show that the sequence $\{t^c_{r_c}\}$ is infinite, which means that the threshold η would go to zero asymptotically. To solve this problem, relying on Assumption 8 we have that:

$$V(\xi) > \alpha_v^{-1} \circ \alpha_e(\eta) \Rightarrow \dot{V} < 0$$

and thus $V(\xi)$ approaches the value $\alpha_v^{-1} \circ \alpha_e(\eta)$. Then, using also the fact that $\lceil \xi \rceil(t) < |\xi(t)| + 2\eta(t^c_{r_c})$ one can state that $\underline{\alpha}^{-1} \circ \overline{V}(\xi)$ approaches the value $\Gamma_2(\eta)$ where:

$$\Gamma_2(s) := \underline{\alpha}^{-1} \circ \overline{\alpha} \circ (2s + \Gamma_1(s)),$$

i.e. in some finite time $t > t^c_{r_c}$: $\underline{\alpha}^{-1} \circ \overline{V}(\xi(t)) \leq \Gamma_2(\eta(t^c_{r_c}))(1 + \epsilon)$, for any $\epsilon > 0$ arbitrarily small. Note also that $\Gamma_2 \in \mathcal{K}_\infty$.

From equation (17), and the above discussion, we see that to guarantee the occurrence of a threshold update event after each threshold update the following inequality needs to be satisfied:

$$\rho\Gamma_2(\eta(t^c_k))) \leq \mu\eta(t^c_{r_c}). \tag{18}$$

As with equations (11) and (13), in order to be able to satisfy this inequality we take the following assumption:

Assumption 15 (Growth rate III)**.**
System (3) with controller k, and Lyapunov function V, satisfies the following property:

$$\lim_{s\to 0}\frac{\Gamma_2(s)}{s}<\infty.$$

Remark 16. *This assumption guarantees that the quotient $\frac{\Gamma_2(s)}{s}$ is bounded in compacts containing the origin. The same idea applies to Assumption 12 and Assumption 13. Note also that the above assumption, as well as all previous assumptions, is automatically satisfied in the case of stabilizable linear systems.*

The following lemma guarantees the infinite occurrence of events of the form (17):

Lemma 17 (Persistence of events)**.**
Given a system (3) and controller k satisfying Assumptions 8 and 15, for every $\mu\in]0,1[$ there exists finite ρ and $t>T$ such that:

$$\rho\underline{\alpha}^{-1}\circ\overline{V}(\xi(t))\leq\mu\eta(T).$$

Proof. The discussion leading to this Proposition, with η being monotonically decreasing (guaranteed by $\mu\in]0,1[$), shows that $\rho\underline{\alpha}^{-1}\circ\overline{V}(\xi(t))$ approaches $\rho\Gamma_2(\eta(T))$ for $t>T$, and actually takes a value $\rho\Gamma_2(\eta(T))(1+\epsilon)$, with $\epsilon>0$ arbitrarily small, in finite time. Assumption 15 guarantees that there exist a finite ρ satisfying $\frac{\mu}{\rho}>(1+\epsilon)\max_{s\in[0,\eta(t_o)]}\frac{\Gamma_2(s)}{s}$ and thus $\rho\Gamma_2(\eta(T))<\mu\eta(T)/(1+\epsilon)$, for $\epsilon>0$. Finally, note that there exists a $t>T$ such that:

$$\rho\underline{\alpha}^{-1}\circ\overline{V}(\xi(t))\leq\rho\Gamma_2(\eta(T))(1+\epsilon)<\mu\eta(T).$$

□

Lemma 17 guarantees that the sequence of threshold updates $\{t^c_{r_c}\}$ is infinite, and thus that $\eta(t)$ goes to zero asymptotically. However, we have not said anything about the time between such threshold updates. It may happen that the infinite, monotonically increasing sequence $\{t^c_{r_c}\}$ has an upper limit (an accumulation point), which would lead to Zeno behavior for the overall system. Note that such a Zeno execution would imply that the system gets arbitrarily close to the origin in finite time. Yet, this kind of behavior is undesirable for practical reasons, as one would not have a minimum time between threshold updates and the controller would need to send commands to the sensors arbitrarily close in time to each other. We conjecture that there are systems in which the described implementation could lead to Zeno behavior due to the threshold's update condition. Nonetheless, one can easily modify the controller triggering condition to enforce a minimum time between updates as follows:

$$\begin{aligned}(19)\qquad t^c_{r_c+1}=\quad\min\quad&\{t=t^c_{r_c}+r\tau^c\,|\,r\in\mathbb{N}^+,\\&\exists s\in[t^c_{r_c},t]\,:\,\rho\underline{\alpha}^{-1}\circ\overline{V}(\xi(s))\leq\mu\eta(t^c_{r_c})\}.\end{aligned}$$

Essentially, this new triggering condition enforces the minimum time τ^c between threshold updates by only allowing to change the thresholds at times that are a multiple of τ^c. Such a solution has an additional practical advantage: sensors know a priori when to expect threshold update commands, and therefore they need only to listen for possible communications at those time instants. Note that the size of τ^c does not affect stability, but it does establish a trade-off between performance and the percentage of time that sensors need to listen for communication. Furthermore, in a practical deployment these listening times could also be used for clock synchronization and other sensor maintenance purposes.

17.1. **One-bit-communications.** We discuss now the implementation of asynchronous event-triggered controllers using one bit communications. The observation that allows such implementations is rather simple: to recover the value of a sensor after a threshold crossing, it is only necessary to know the previous value of the sensor and the sign of the error ε_i when it crossed the threshold. In fact, if one assumes an initial round of measurements when the system is initialized, then the necessary piece of information to recover the state can be represented by a single bit indicating the sign of the error, and the actual sensor measurement can be recovered recursively as:

$$\hat{\xi}_i(t^i_{r_i}) = \hat{\xi}_i(t^i_{r_i-1}) + (2d_i(t^i_{r_i}) - 1)\sqrt{\eta_i(t^i_{r_i-1})}, \tag{20}$$

where $d_i(t^i_{r_i}) \in \{0,1\}$ denotes the negative (0) or positive (1) sign of the error in the last received update. Remember that the controller can actually keep track of the values η_i employed by each of the sensors. Similarly, the messages from the controller to the sensors commanding a reduction of the thresholds can be indicated with a single bit, which would also leave the possibility open for commanding the increment of thresholds or a synchronized measurement e.g. whenever the controller detects the system suffered an impulsive disturbance.

17.2. **Global inter-transmission bounds.** In order to make the technique proposed in this section practical, we still need to deal with a last stumbling block: the minimum time between sensor transmissions at times of thresholds updates. As mentioned earlier in the paper, if one would update the sensor's thresholds whenever the controller considers it is time to do so, it could happen that some sensors, by reducing their local threshold, automatically violate their triggering condition. Further, this could lead to times between transmissions of the same sensor violating the bounds obtained in Lemma 10. Fortunately, there is a simple solution guaranteeing new lower bounds of the time between transmissions.

Assume at time t_u the value of the threshold η is reduced becoming $\eta(t_u) = \mu\eta(t_u^-)$, where by $\eta(t_u^-)$ we indicate the value of η inmediately before its update.At this time, there may be some sensor i for which the error signal $\varepsilon_i^2(t_u) > \eta_i(t_u)$. Fortunately, one can always bound how much ε_i^2 can be above the new threshold as:

$$\varepsilon_i^2(t_u) - \eta_i(t_u) \le \eta_i(t_u^-) - \eta_i(t_u) = (\frac{1}{\mu^2} - 1)\eta_i(t_u).$$

If the reduction of the threshold triggers a sensor transmission, *i.e.* if $\varepsilon_i^2(t_u) > \eta_i(t_u)$, then as $\hat{\xi}_i(t^i_{r_i+1}) = \hat{\xi}_i(t^i_{r_i}) + \varepsilon_i(t^i_{r_i})$ and $\varepsilon_i(t^i_{r_i}) = \mathtt{sign}(\varepsilon_i(t^i_{r_i}))\sqrt{\eta_i(t^i_{r_i})}$, the controller is updated with a value:

$$\hat{\xi}_i(t_u) = \hat{\xi}_i(t_u^-) + \mathtt{sign}(\varepsilon_i(t_u))\sqrt{\eta_i(t_u)}, \tag{21}$$

where $\hat{\xi}_i(t_u^-)$ denotes the value of $\hat{\xi}_i$ immediately before the update is applied at t_u. This is equivalent to reseting the local error at the triggering sensor, after such a controller update, to a non-zero value:

$$\varepsilon_i^2(t_u) \in [0,\ (\frac{1}{\mu^2} - 1)\eta_i(t_u)[.$$

Therefore, the minimum time between transmissions now needs to be modified to take into account this non-zero initial condition for ε_i. This is an easy modification that results in the following new lower bounds for the inter-transmission times:

$$\tilde{\tau}_i^* = \left(1 - \sqrt{\frac{1-\mu^2}{\mu^2}}\right)\tau_i^*, \tag{22}$$

which, in order to get lower bounds greater than zero, forces us to take $\mu > \sqrt{0.5}$.

Yet, we have only addressed the time between transmissions after a possible instantaneous triggering due to a threshold update. We still need to find a way of preventing this instantaneous updates to happen arbitrarily close to a previous sensor triggering. This problem admits a rather simple solution. In the proposed solution we distinguish between the threshold we would like to be imposing in the system, which we will denote $\tilde{\eta}$, and the actual threshold being applied at each time $\eta = \sqrt{\sum_i \eta_i}$. The auxiliary threshold function is $\tilde{\eta}$ is then given by:

$$\begin{aligned} \tilde{\eta}(t) &= \tilde{\eta}(t^c_{r_c}),\ \forall\, t \in [t^c_{r_c}, t^c_{r_c+1}[\\ \tilde{\eta}(t^c_{r_c+1}) &:= \mu\tilde{\eta}(t^c_{r_c}). \end{aligned} \tag{23}$$

We must redefine the sequence of thresholds' updates so that they depend now on $\tilde{\eta}$:

$$\begin{aligned} t^c_{r_c+1} = \ \min\ &\{t = t^c_{r_c} + r\tau^c \,|\, r \in \mathbb{N}^+, \\ &\exists s \in [t^c_{r_c}, t]\ :\ \rho\underline{\alpha}^{-1} \circ \overline{V}(\xi(s)) \le \mu\tilde{\eta}(t^c_{r_c})\}, \end{aligned} \tag{24}$$

Finally, define the local threshold update rules as:

$$\eta_i(t) = \theta_i^2\tilde{\eta}^2(t - \tilde{\tau}_i^*),\ \forall\, t, \tag{25}$$

i.e. update the local thresholds only $\tilde{\tau}_i^*$ units of time after the controller detects that the thresholds can be updated. This simple trick guarantees that the threshold update will not produce a triggering closer than $\tilde{\tau}_i^*$, and thus this minimum time is respected throught a system execution.

Finally, Lemma 11 and Lemma 17 can be put together with the discussion on this section to provide the following theorem:

Theorem 17.1 (Asymptotic stability II)**.**
Given a system (3) and a controller k satisfying Assumptions 8, 9, 12 and 15, the controller implementation:

$$\upsilon(t) = k(\hat{\xi}(t))$$

with $\hat{\xi}$ determined by (20), (6), (23), (24) and (25), renders the closed-loop system asymptotically stable for any $\mu \in]\sqrt{0.5}, 1[$ and ρ satisfying:

$$\frac{1}{\rho} > \max_{s \in [0, \eta(t_o)]} \frac{\max\{\Gamma_1(s), \mu^{-1}\Gamma_2(s)\}}{s},$$

and initializing η as:

$$\eta(t^c_0) \ge \rho\underline{\alpha}^{-1} \circ V(\xi(t^c_0)).$$

Furthermore, this implementation guarantees lower bounds of the inter-transmission times of each sensor given by (22).

17.3. **Other practical issues.** Most of the effects of a real practical implementation can be abstracted in the form of a delay in the proposed event-triggered implementation. We illustrate this with a specific practical effect affecting our implementations. We note that in our implementations controller updates can take place arbitrarily close to each other. This is so because while one sensor cannot trigger updates arbitrarily close to each other, the combination of all sensors can potentially force that. This makes the proposed techniques more suitable for systems with controller and actuators co-located. As we did in [14], we suggest the use of a periodic subjacent scheme for the update of the controller. The effect of such a scheme is the introduction of an artificial delay in the closed-loop system.

It is therefore important to illustrate how delays can be accomodated. The kind of delays we consider are those between the event-generation at the sensor side and its reflection in the control inputs applied to the system. Essentially, what most event-triggered techniques do is control the magnitude of the virtual error introduced by sampling in a digital implementation. If the magnitude of this error signal is succesfully kept within certain margins, the controller implementation is stable. This error signal that one must control is defined at the plant side. Therefore, in our case, while the sensors send new measurements trying to keep $|\varepsilon_i(t)| = |\xi_i(t^i_{r_i}) - \xi_i(t)| \leq \eta_i$, what actually matters is the value of the error at the plant-side $\hat{\varepsilon}_i(t)$, defined as:

$$\hat{\varepsilon}_i(t) = \xi(t^i_{r_i-1}) - \xi(t) \qquad t \in [t^i_{r_i}, t^i_{r_i} + \Delta\tau[\tag{26}$$

$$\hat{\varepsilon}_i(t) = \varepsilon_i(t) \qquad t \in [t^i_{r_i} + \Delta\tau, t^i_{r_i+1}[. \tag{27}$$

From the analysis in the proof of Lemma 10 we have that the maximum speed of the error signal is always kept below $L_{f_i}\frac{1+\rho}{\rho}\eta$ and thus, given a maximum delay of $\Delta\tau < \frac{\rho}{(1+\rho)L_{f_i}}$, reducing the local thresholds as:

$$\theta_i \bar{\eta} = \theta_i \eta \left(1 - L_{f_i}\frac{1+\rho}{\rho}\Delta\tau\right)$$

guarantees that the error at the plant side stays below the desired value $\hat{\varepsilon}_i(t) \leq \eta$.

Another important question is how to deal with the presence of disturbances. It is obvious that in the case of a persistent general disturbance, in the best case one can achieve practical stability where the region to which the system will converge depends on the magnitude of the disturbance. Consider for the discussion the closed loop dynamics $\dot{\xi} = f(\xi, k(\xi + \varepsilon), \delta)$, where δ is a disturbance signal. Now, further assume the closed-loop system is ISS also with respect to the disturbance, *i.e.* there exists an ISS Lyapunov function V such that $\dot{V}(x, e, d) \leq -\alpha_v \circ V(x) + \alpha_e(|e|) + \alpha(|d|)$. In order to obtain minimum inter-transmission times greater than zero, it is obvious that now we cannot let η go to zero. Instead, one would have to select a minimum η_m guaranteeing a region to which the system converges small enough for the application at hand. If the disturbance has bounded magnitude, *i.e.* $\|\delta\|_\infty \leq n_d \eta_m$ with some $n_d \in \mathbb{R}^+$, one can easily show that the minimum inter-transmission times guaranteed by Lemma 10 can be recomputed to be:

$$\tau^*_i \geq \frac{L^{-1}_{f_i}\theta_i\rho}{1 + (n_d + 1)\rho}.$$

If one would like to design a system resilient also to impulsive disturbances, rather than employing the analysis just proposed, it might be a better idea to enable a mechanism in the implementation to force a synchronous update (essentially a reinitialization of the system) to compensate for such impulses. A more detailed analysis of these solutions is left for future work.

Finally, we would like to make some remarks with respect to the performance guarantees. While it may be possible to provide explicit performance guarantees of the implementations, they would take very complicated form that would make them arguably practical. Instead of providing such performance guarantees, let us give an intuition on how the different design parameters affect the convergence speed of the implementation and the triggering of events at sensors and controller. There are three design parameters for the fully event-triggered implementation of Theorem 17.1: ρ, μ and τ^c and two: ρ and the sequence $\{t_k^c\}$ in the case of the implementation from Theorem 13.1. Reducing any of the parameters implies a faster convergence of the system with the implementation of Theorem 17.1 and likewise reducing ρ and/or the spacing between times t_k^c also improve the performance of the implementation of Theorem 13.1. However, while reducing ρ leads to more frequent inter-transmission times from the sensors, reducing μ also reduces, in general, how frequently the update requests are sent from the controller to the sensors.

18. Simulation Results

We illustrate our results, for space efficiency and simplicity, with a linear system example. We borrow the Batch Reactor model from [21], used as a benchmark by several authors [6, 13], with state space description:

$$\dot{\xi} = \begin{bmatrix} 1.38 & -0.20 & 6.71 & -5.67 \\ -0.58 & -4.29 & 0 & 0.67 \\ 1.06 & 4.27 & -6.65 & 5.89 \\ 0.04 & 4.27 & 1.34 & -2.10 \end{bmatrix} \xi + \begin{bmatrix} 0 & 0 \\ 5.67 & 0 \\ 1.13 & -3.14 \\ 1.13 & 0 \end{bmatrix} \upsilon$$

A state feedback controller placing the poles of the closed loop system at $\{-3 + 1.2i, -3 - 1.2i, -3.6, -3.9\}$ is given by:

$$K = \begin{bmatrix} 0.1006 & -0.2469 & -0.0952 & -0.2447 \\ 1.4099 & -0.1966 & 0.0139 & 0.0823 \end{bmatrix}.$$

The matrix P determining the Lyapunov function $V(x) = \sqrt{x^T P x}$ results from solving the associated Lyapunov equation $I = -(PA_c + A_c^T P)$. With this design, $\mu = 0.9$ and $\rho = 0.087$ satisfy the requisites of Theorem 17.1. We also initialize $\eta(t_o) = \rho \underline{\alpha}^{-1} \circ V(\xi(t_o))$ and set $\theta_1 = 0.57$, $\theta_2 = 0.37$, $\theta_3 = 0.66$ and $\theta_4 = 0.30$.

This design provides the same minimum inter-transmission times for all sensors $\tilde{\tau}_i^* = 286\mu s$, which after compensating for a communication delay of $100\mu s$ and the delay introduced by a $\tau^c = 100\mu s$, results in a minimum inter-transmission time of $86\mu s$. However, in the example illustrated in the figures the minimum times that were observed were actually $\underline{\tau}_1 = 1ms$, $\underline{\tau}_2 = 393\mu s$, $\underline{\tau}_3 = 566\mu s$ and $\underline{\tau}_4 = 1.1ms$. Furthermore, the average inter-transmission times observed in $10s$ where $\overline{\tau}_1 = 38.8ms$, $\overline{\tau}_2 = 20.8ms$, $\overline{\tau}_3 = 31.2ms$ and $\overline{\tau}_4 = 17.1ms$. Figure 1 shows how the system is actually stabilized asymptotically. In Figure 2 we can see the evolution of the inter-transmission times at the four sensors. Figure 3 shows the evolution of all the thresholds at the sensors.

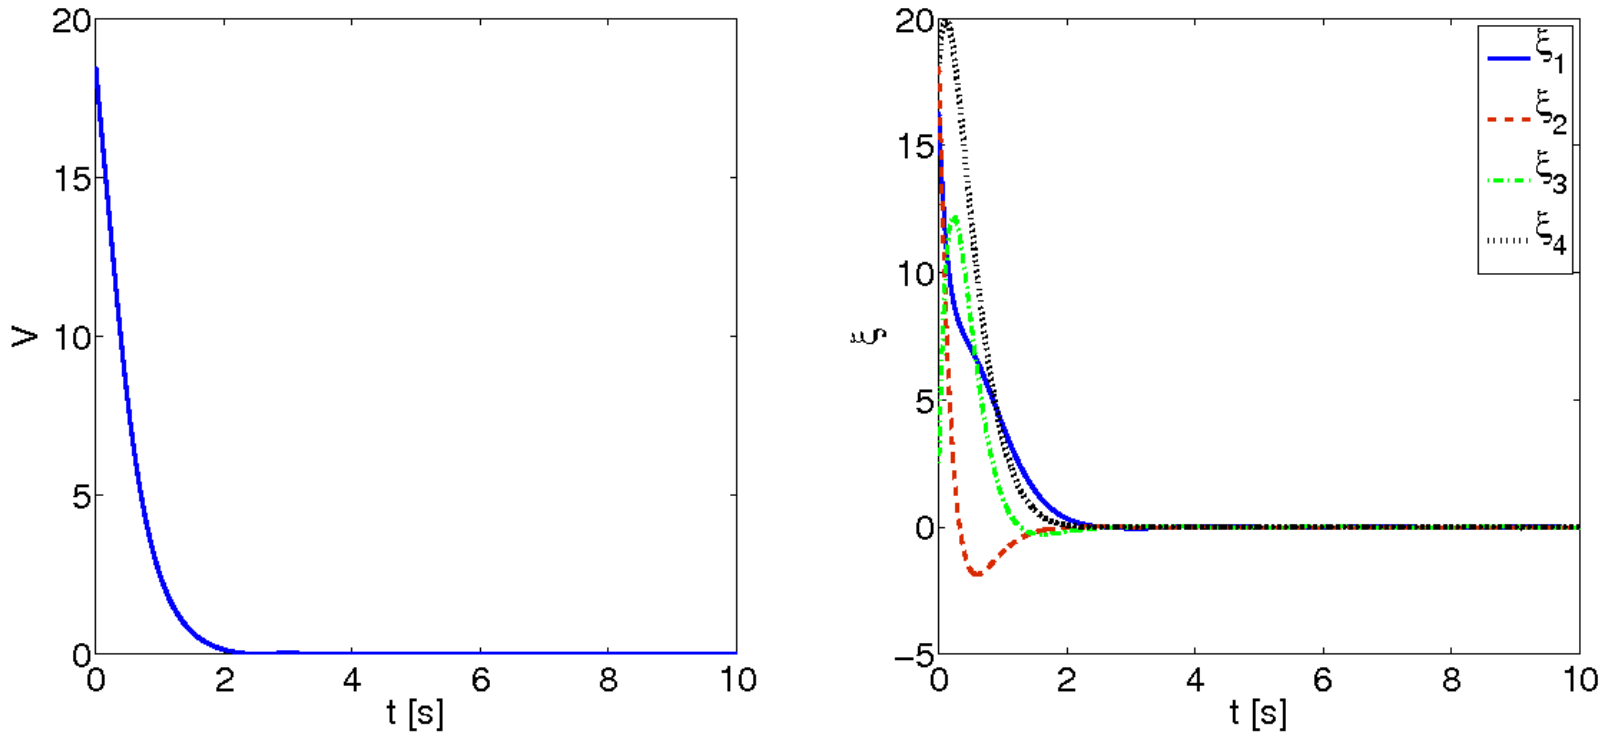

FIGURE 1. Lyapunov function and state trajectory evolution.

19. DISCUSSION

We have shown how asymptotic stability can be attained with fully decentralized event-triggered implementations. At this point, it is important to make a distinction between having decentralized event-triggered conditions, and having a decentralized controller. We have concentrated on the process of deciding when to transmit measurements between sensors, controllers and actuators, making it truly decentralized. It would also be interesting to see how the present approach combines with the case of decentralized/distributed controllers.

Some discussion needs to be provided with respect to the assumptions put in place. The main of the assumptions being the requirement of having a controller rendering the system ISS on compacts with respect to measurement errors. It is important to remark that this property does not need to be globally satisfied but only in the compact of interest for the system operation (as our results are of semi-globlal nature), which relaxes drastically the requirement and makes it also easier to satisfy [7]. Furthermore, in practice one is usually not so much concerned with convergence exactly to the origin, but rather to a sufficiently small region around the origin. We would like to remark that therefore, in practice, the assumptions 15, 12 and 13 are no longer necessary for the existence of an implementation.

As the simulated example illustrated, the guarantees that the analysis provides are highly conservative. The main reason for this conservatism can be found in the use of Lipschitz constants for the bounding of the speed of the system on a compact. In fact, we requested the rather conservative assumption on the dynamics of the system to be Lipschitz, when all it would actually be required from the system for our proposals to work is to have dynamics that "slow down" as the system approaches its equilibrium. While the assumptions put in place provide with a clean theory and easy to follow results, it would be desirable to study computational methods capable of reducing this conservatism gap. This idea is not new, and has already been applied to several techniques in the case of linear systems employing LMI solvers [6, 9].

Following these comments we leave as follow-up work the design of computational methods to relax the conservative bounds obtained, and also to help in the design itself of the implementation, *i.e.* the selection of adequate ρ and μ.This approach

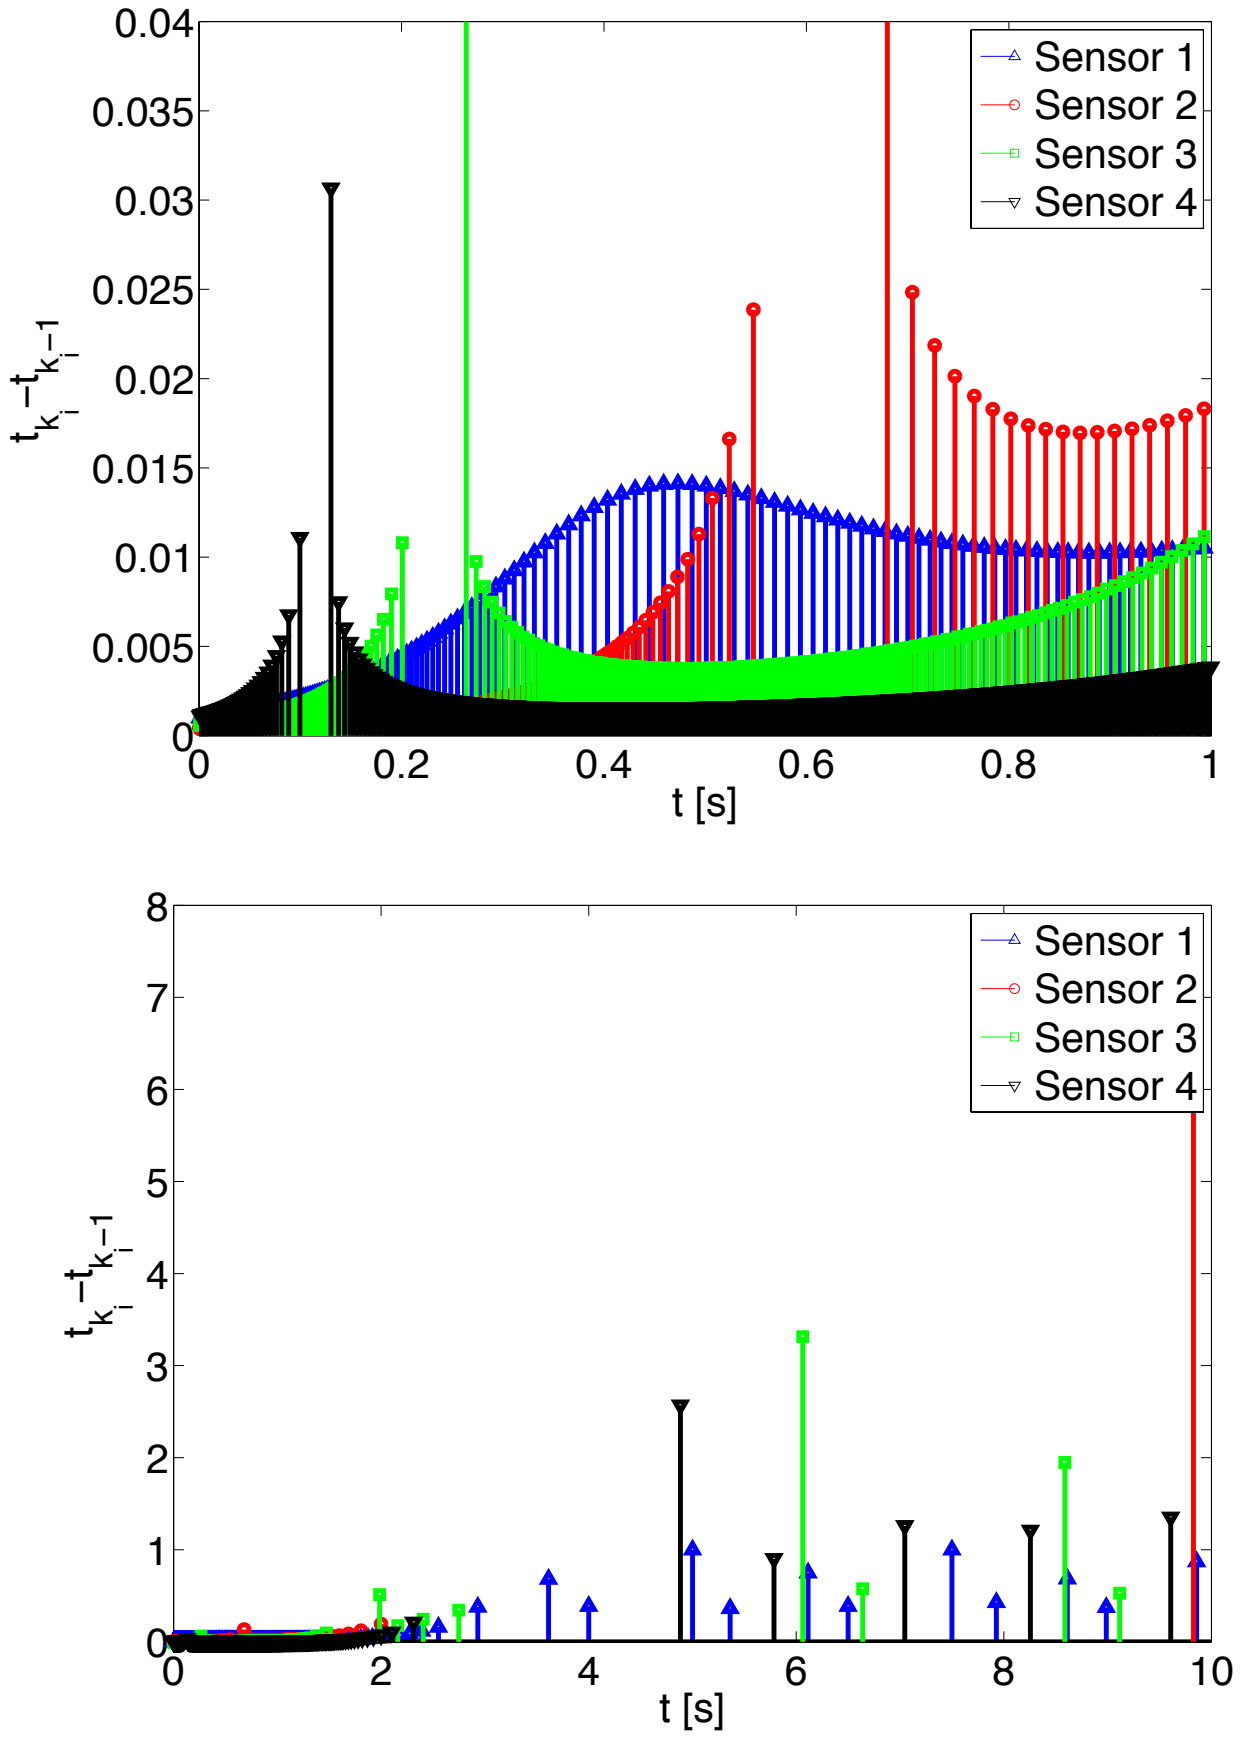

FIGURE 2. Times between transmissions at each of the sensors and a zoom on the first second.

also opens the door to the analysis to optimize controller design and implementation for data-rate transmissions. Also, in the more practical side of the future work, it is desirable the study and design of protocols for wireless communications exploiting the benefits of the proposed techniques. On the more theoretical side, many of the practical effects briefly discussed in Section 17.3 can, and probably should, be studied in more detail. In particular, and connected to the computational approaches, the provision of guarantees of performance, including the response to disturbances. Finally, it would also be interesting to study controller designs for useful classes of non-linear systems that satisfy the current assumptions, or relaxed versions of them, to enable the proposed implementations.

REFERENCES

[1] A. Agrachev, A. S. Morse, E. Sontag, H. Sussmann, and V. Utkin. Input to state stability: Basic concepts and results. In *Nonlinear and Optimal Control Theory*, volume 1932 of *Lecture Notes in Mathematics*, pages 163–220. Springer Berlin / Heidelberg, 2008.

[2] A. Anta and P. Tabuada. To sample or not to sample: Self-triggered control for nonlinear systems. *IEEE Transactions on Automatic Control*, 55:2030–2042, Sep. 2010.

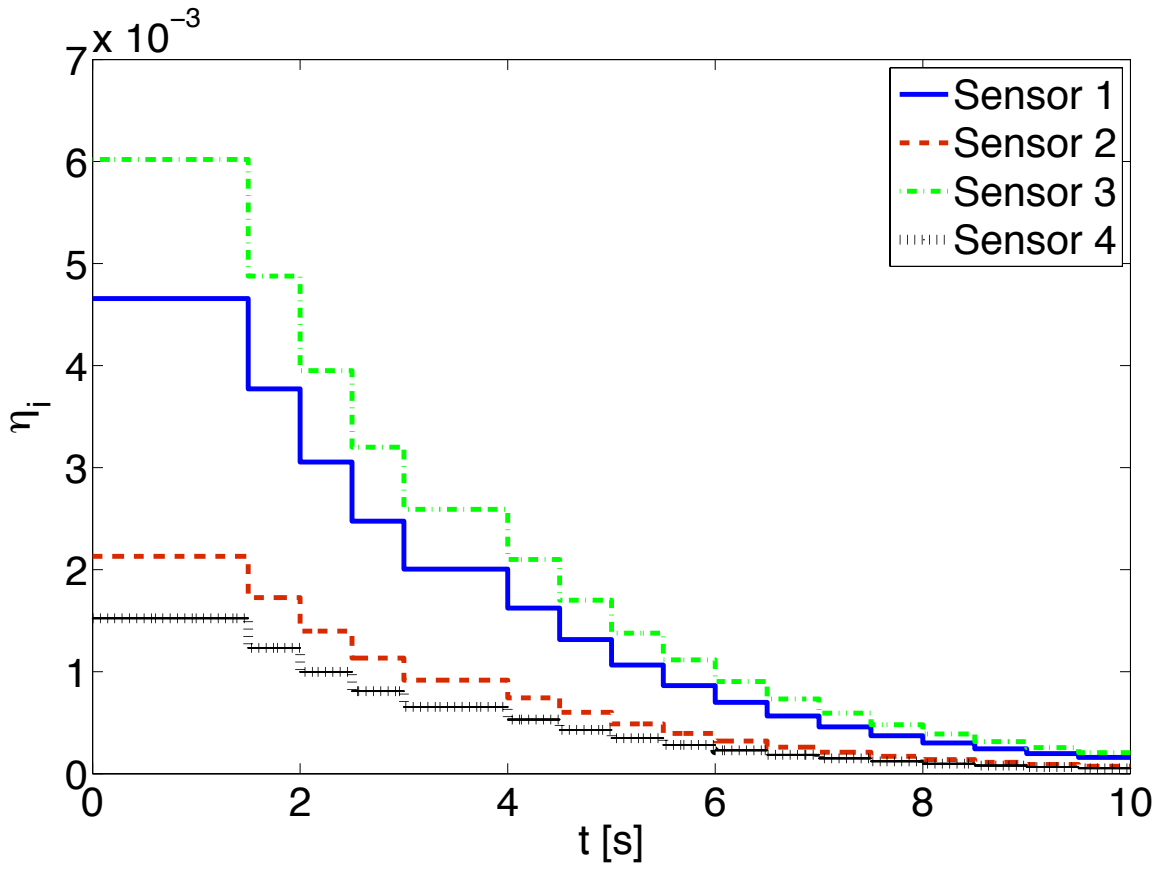

Figure 3. Evolution in time of the vector of thresholds η.

[3] J. Araujo, A. Anta, M. Mazo Jr., J. Faria, A. Hernandez, P. Tabuada, and K.H. Johansson. Self-triggered control over wireless sensor and actuator networks. In *Distributed Computing in Sensor Systems and Workshops (DCOSS), 2011 International Conference on*, pages 1 –9, june 2011.

[4] K.J. Åström and B.M. Bernhardsson. Comparison of Riemann and Lebesgue sampling for first order stochastic systems. In *Proceedings of the 41st IEEE Conference on Decision and Control*, volume 2, pages 2011 – 2016, Dec. 2002.

[5] A. Cervin and T. Henningsson. Scheduling of event-triggered controllers on a shared network. In *Proceedings of the 47th IEEE Conference on Decision and Control*, pages 3601 –3606, Dec. 2008.

[6] M. Donkers, W. Heemels, N. van de Wouw, and L. Hetel. Stability analysis of networked control systems using a switched linear systems approach. *IEEE Transactions on Automatic Control*, 56(9):2101–2115, Sept. 2011.

[7] R. Freeman. Global internal stabilizability does not imply global external stabilizability for small sensor disturbances. *IEEE Transactions on Automatic Control*, 40(12):2119 –2122, dec 1995.

[8] W.P.M.H. Heemels, J.H. Sandee, and P.P.J. van den Bosch. Analysis of event-driven controllers for linear systems. *International Journal of Control*, 81(4):571–590, 2008.

[9] L. Hetel, A. Kruszewski, W. Perruquetti, and J. Richard. Discrete and intersample analysis of systems with aperiodic sampling. *IEEE Transactions on Automatic Control*, 56(7):1696 –1701, july 2011.

[10] A. Isidori. *Nonlinear control systems*. Springer Verlag, 1995.

[11] D. Liberzon. Hybrid feedback stabilization of systems with quantized signals. *Automatica*, 39(9):1543–1554, 2003.

[12] J. Lunze and D. Lehmann. A state-feedback approach to event-based control. *Automatica*, 46(1):211 – 215, 2010.

[13] M. Mazo Jr., A. Anta, and P. Tabuada. An ISS self-triggered implementation of linear controller. *Automatica*, 46:1310–1314, Aug. 2010.

[14] M. Mazo Jr. and M. Cao. Decentralized event-triggered control with asynchronous updates. In *Proceedings of the 50th Conference on Decision and Control*, pages 2547–2552, 2011.

[15] M. Mazo Jr. and M. Cao. Decentralized event-triggered control with one bit communications. In *4th IFAC Conference on analysis and design of hybrid systems (ADHS'12), Eindhoven, The Netherlands*, pages 52–57, 2012.

[16] M. Mazo Jr. and P. Tabuada. Decentralized event-triggered control over wireless sensor/actuator networks. *IEEE Transactions on Automatic Control, Special issue on Wireless Sensor Actuator Networks*, 56(10):2456–2461, Oct. 2011.

[17] A. Molin and S. Hirche. Optimal event-triggered control under costly observations. In *Proceedings of the 19th International Symposium on Mathematical Theory of Networks and Systems*, pages 2203–2208, 2010.

[18] P.G. Otanez, J.R. Moyne, and D.M. Tilbury. Using deadbands to reduce communication in networked control systems. In *American Control Conference, 2002. Proceedings of the 2002*, volume 4, pages 3015 – 3020 vol.4, 2002.

[19] M. Rabi and K. H. Johansson. Event-triggered strategies for industrial control over wireless networks. In *Proceedings of the 4th Annual International Conference on Wireless Internet*, WICON '08, pages 34:1–34:7, ICST, Brussels, Belgium, Belgium, 2008. ICST (Institute for Computer Sciences, Social-Informatics and Telecommunications Engineering).

[20] P. Tabuada. Event-triggered real-time scheduling of stabilizing control tasks. *IEEE Transactions on Automatic Control*, 52(9):1680 –1685, Sept. 2007.

[21] G.C. Walsh and Hong Ye. Scheduling of networked control systems. *Control Systems, IEEE*, 21(1):57 –65, feb 2001.

[22] X. Wang and M.D. Lemmon. Event-triggering in distributed networked control systems. *IEEE Transactions on Automatic Control*, 56(3):586–601, 2011.

[23] J. Weimer, J. Araújo, and K.H. Johansson. Distributed event-triggered estimation in networked systems. In *4th IFAC Conference on analysis and design of hybrid systems (ADHS'12), Eindhoven, The Netherlands*, pages 178–185, 2012.

[24] Wei Ye, J. Heidemann, and D. Estrin. An energy-efficient mac protocol for wireless sensor networks. In *INFOCOM 2002. Twenty-First Annual Joint Conference of the IEEE Computer and Communications Societies. Proceedings. IEEE*, volume 3, pages 1567 – 1576 vol.3, 2002.